

# FLAGON TPO WALKWAY



## Description:


Membrane composed of modified polyolefin (TPO) and a polyester reinforcement. Used as an anti-slip finish. The membrane is distinguished by a very high resistance to weathering and UV-rays. The top has an embossed structure.

## Composition:

Material: modified polyolefin (TPO)  
Reinforcement: polyester

## Packing:

Membrane thickness (mm): 1.8  
Length of roll (m): 20  
Width of roll (m): 1.000  
Weight of roll (kg): 33.6  
Rolls/pallet: 23

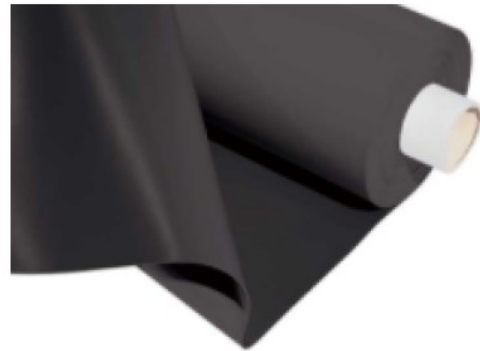

## Installation:

Applied as walkway on modified polyolefin (TPO) waterproofing systems. Welded with hot air. The membrane is applied in conjunction with accessories from Flagon.

## Special Indications:

**Hygiene, Health and Environment**  
The membrane does not contain any substance which is likely to be detrimental to your health or to the environment and complied with generally admitted Health and Safety Requirements. For more information, please refer to the relevant safety data sheet.

**Quality, Environment and Safety Management**  
SOPREMA always recognizes as a high level of importance the quality of the products, the environment and safety. For this reason, we operate independently monitored Quality and Environment Assurance Systems in line with EN ISO 9001 and EN ISO 14001.

Characteristics:		
Membrane thickness (mm) (EN 1849-2)	MDV	1.8
Weight (kg/m <sup>2</sup> ) (EN 1849-2)	MDV	1.68
Maximum tensile force (N/50 mm) (EN 12311-2 met A)	MLV	1100
Elongation at maximum tensile force (%) (EN 12311-2 met A)	MLV	15
Resistance to impact (mm) (EN 12691)	MLV	800
Foldability at low temperature (°C) (EN 495-5)	MLV	-40
Watertightness (EN 1928 met B)		Conform
Dimensional stability (%) (EN 1107-2)	MLV	0.5
Durability: exposure to UV, heat and water (EN 1297)		Grade 0



Equus Industries Ltd  
PO Box 601  
Blenheim  
Phone: 03 578 0214  
Email: admin@equus.nz  
Website: www.equus.nz  
July 2021