

# Equus Termination Bar

## Description:

The **Equus Termination Bar** is a pre-manufactured profile that terminates the waterproofing membrane at the wall in a professional and watertight, wind-peel resistant manner with the addition of 50 mm flange for securing drainage board.

The **Equus Termination Bar** is used at concrete or wooden walls and curbs.

## General Use:

Tanking situations where backfill covers membrane and termination bar.

## Characteristics:


Material:	Extruded aluminium profile (Al Mg Si 0,5 F22 quality)
Tensile strength:	215 N/mm <sup>2</sup>
Yield point:	160 N/mm <sup>2</sup>
Elongation:	10%
Hardness:	70 brinell
Length:	2400 mm
Width:	110 mm
Colour:	Metallic
Thickness:	2 mm
Predrill:	200 mm

## Advantages:

- Increases the durability of the waterproofing system.
- Increases the bonding of the waterproofing to the wall or curb.
- Wind-peel resistant.
- Corrosion resistant.
- Continuous quality.
- Provides an aesthetical, straight finishing.
- Provides a dripping point off the wall.
- Predrilled holes
- Lip for securing drainage layer.

## Installation:

- The waterproofing is installed according to manufacturers details.
- The **Equus Termination Bar** is fastened at the edge of the waterproofing membrane into the wall.
- The space created at the top of the **Equus Termination Bar** is filled with a sealant compatible to the wall's material, bitumen and aluminium. **Equus** recommends **Alsanc Mastic 2000**.

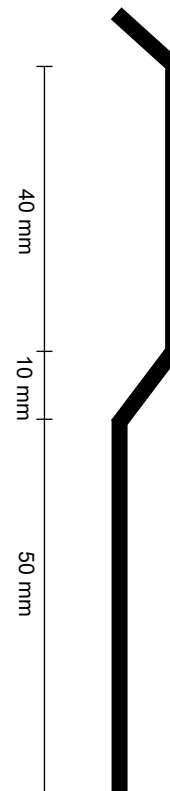

Equus Industries Ltd  
PO Box 601  
Blenheim  
Phone: 03 578 0214  
Email: [admin@equus.nz](mailto:admin@equus.nz)  
Website: [www.equus.nz](http://www.equus.nz)  
July 2021