

EQUUS SOPREMA EASY FLASHING

Easy waterproofing: liquid applied membrane



SOPREMA EASY FLASHING is an environmentally friendly, water-based product. It can be used to waterproof, protect and seal cracks of substrates such as plywood, metal and cementitious surfaces. **EASY FLASHING** can also be used to repair old, deteriorated bituminous waterproofing layers and to encapsulate old asbestos roofs. It adheres to all kinds of insulating panels, to concrete, or bitumen-based waterproofing systems.

EASY FLASHING is a ready-to-use, semi-dense, thixotropic black paste. Formulated with a water-based bitumen emulsion, selected elastomeric resins and special additives – this product offers excellent watertightness, protection, adhesion, and elasticity.

EASY FLASHING is easy to use and is a great option for those looking for a simple and safe solution for surfaces no longer able to defend the building against water.



Roof repairs


Key Benefits:

- Watertight and ponding resistant
- Environmentally friendly (water-based)
- Easy to apply, and adheres to a variety of substrates, even when damp
- Waterproofs and protects against atmospheric agents and UV rays
- Crack resistant at low temperatures and drip resistant at high temperatures



INSTALLATION

- **Surface Preparation**
Clean the surfaces to be treated with EASY FLASHING. Dust, loose, and crumbling parts must be removed.
- **Application**
Apply EASY FLASHING with brush, roller or spray with suitable airless equipment. It is recommended never to exceed the thickness of 1 mm for each coat, to avoid cracking of the product and long drying times.
- EASY FLASHING can be applied on wet surfaces as long as there is no stagnation of water.
- EASY FLASHING can be applied in temperatures from +5°C to +40°C.
- To limit heat absorption, EASY FLASHING can be topcoated with two coats of Chevaline Dexx Topcoat. Ensure membrane is completely cured before topcoat application.

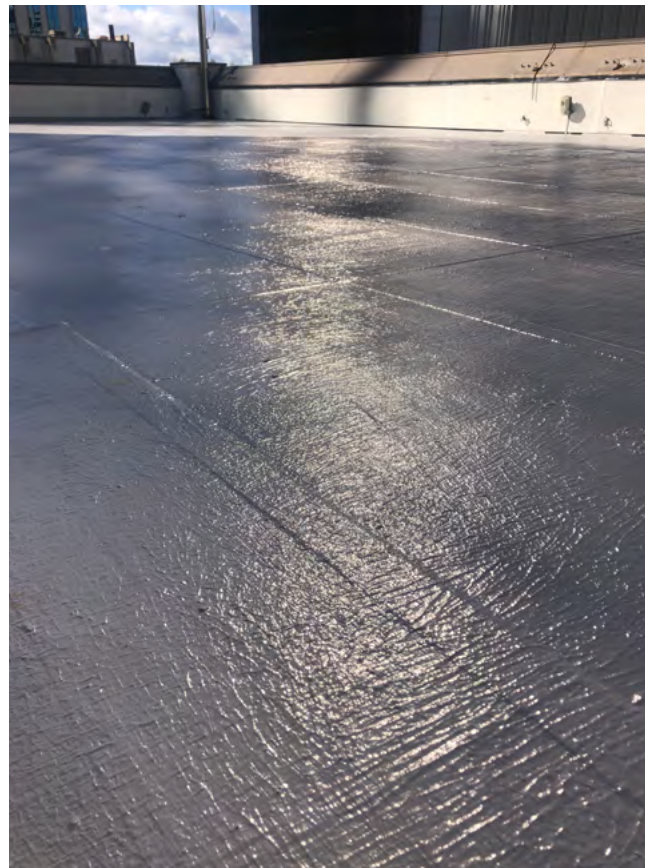

Equus SOPREMA Technical Support:

- Project specific specifications and details
- Expert Technical Assistance
- On-site quality assurance
- Nationwide network of Certified Applicators
- Warranties available

<p>Equus Southern</p> <p>Unit 6/100 Fitzgerald Ave Christchurch</p> <p>Ph: 03 353 2434</p> <p>southern@equus.nz</p>	<p>Equus Central</p> <p>45 Hutt Rd, Petone Wellington</p> <p>Ph: 04 576 0333</p> <p>central@equus.nz</p>	<p>Equus Northern</p> <p>211 Archers Rd, Wairau Valley, Glenfield, Auckland</p> <p>Ph: 09 415 4314</p> <p>northern@equus.nz</p>
--	---	--

Find us on:

masterspec

ARCHIPRO

